

AVIGILON™

12/24V 16-DOOR FLEX POWER SMART HUB


EXPANDABLE ACCESS CONTROL FOR THE
MODERN WORKPLACE



Smart Hubs are shipped unassembled. Some hardware may show the Openpath logo.

SYS-16ENT-DVE6

Seamlessly expand your access control with our modular Core Series Smart Hub that features configurable inputs, encryption at every level, and powerful, cloud-based management to enable secure, dynamic access control for any facility. The Smart Hub connects to expansion boards that include ports for 16 Avigilon Smart Readers, Request to Exit (REX) inputs, and Contact Sensors. It uses RS-485 wiring to connect to the Smart Readers and is powered by the built-in 12VDC and 24VDC supplies.



SEAMLESSLY EXPAND AND SCALE

This Smart Hub is designed to handle a single closet or single floor deployment with its 16-door configuration with integrated power for locking hardware.



PREMIUM HARDWARE FOR BEST PERFORMANCE

The Smart Hub features a future-proof Access Control Core that securely makes all entry decisions. It features a 12/24VDC Flex Series power supply and expansion boards. Take advantage of the larger enclosures for easy cable management.



EASY MANAGEMENT WITH SMART MONITORING

Network and device monitoring systems built in to ensure a smooth experience for our users, with remote diagnostic and troubleshooting capabilities to resolve any issues with ease.



100% REMOTE CLOUD MANAGEMENT

Do more with less by securely and easily connecting to the cloud for remote system management, diagnostics, and communication.



HASSLE-FREE INSTALLATION

Aluminum backplate and plug-and-play design allows for easy expansion, customization and mounting, with interoperability to integrate with physical on-premise systems and logical software-based systems.



LIFETIME WARRANTY

Take advantage of the peace of mind knowing that Avigilon stands behind its access control hardware with a lifetime warranty, guaranteeing the ultimate quality for your security solution.

For more information, visit [avigilon.com/access-control/12-24v-16-door-core-series-flex-smart-hub](https://www.avigilon.com/access-control/12-24v-16-door-core-series-flex-smart-hub).


SPECIFICATIONS

SYSTEM

Access Control	Up to 16 Avigilon Smart Readers
Door Relays	16 relays, 5A @ 24VDC (resistive)
Auxiliary Relays	8 relays, 1A @ 24VDC 8 auxiliary relays and 8 configurable auxiliary I/O pins provide extra inputs and outputs, and allow more sensors or Wiegand devices
Avigilon Readers	Up to 16 Avigilon Smart Readers Uses industry standard RS-485 signaling to communicate with Avigilon readers over standard wiring
Communication Ports	10/100/1000 baseT Ethernet; USB port
REX and Contact Sensors	16 REX and 16 contact sensor inputs with EOL monitoring, nominal 5VDC, 1kohm to each input
Auxiliary Inputs	8 input lines with EOL monitoring
Power Supply	Up to 12A @ 12V and 7A @ 24V available for locking hardware
Backup Battery	For 24V supply, use two 12VDC sealed lead acid (SLA) or gel cell batteries in series For 12V supply, use one 12VDC SLA battery

MECHANICAL

Dimensions

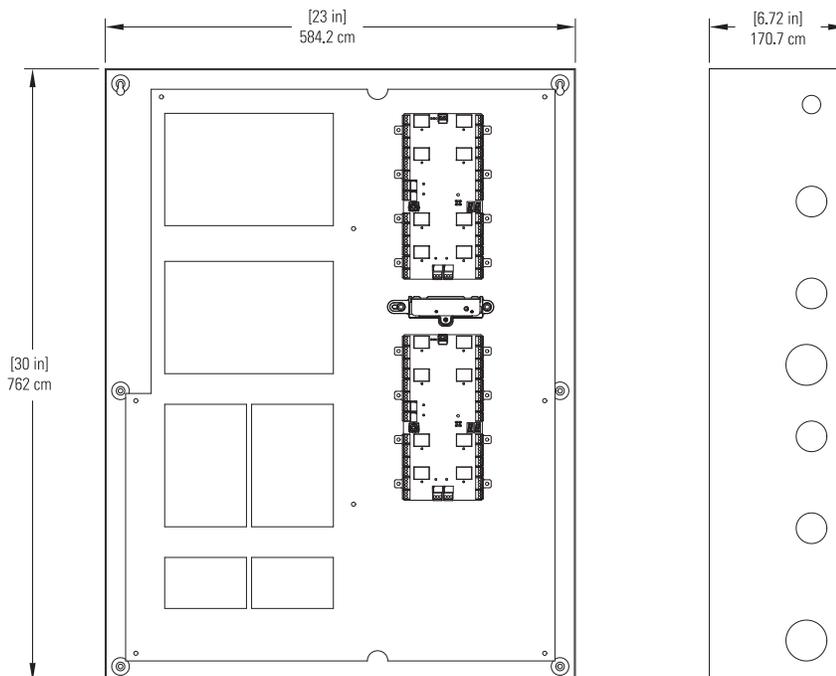

Weight	Approx. 45 lbs (20.41 kg)
Power Supply	LifeSafety Power® E6 enclosure pre-installed with 24V FP0250 Power Supply, 12V or 24V FP0150 Power Supply, two C8 Lock Control Modules, and two D8P Power Distribution Modules
Wiring	Uses RS-485 wiring to connect to the Avigilon Smart Readers EOL monitoring with single or double termination on all REX, Contact, and Auxiliary inputs supported with user-installed 1k resistors

ELECTRICAL

Input Voltage	120/230 VAC 50/60 Hz
Operating Voltage	12-24VDC
Operating Current	3.6A @ 24VDC with 16 Avigilon Smart Readers 1.4A @ 24VDC with no Avigilon Smart Readers

ENVIRONMENTAL

Operating Temperature	0°C to 50°C (32°F to 122°F)
Operating Humidity	5% to 85% relative, non-condensing

CERTIFICATIONS

CE, IC, FCC, UL294

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
-------------	-------------

SYS-16ENT-DVE6	12/24V 16-Door Flex Power Smart Hub - E6 Enclosure Shipped separately: Avigilon Access Control Core (OP-CR-ACC), two Avigilon 8-Port Boards (OP-EX-8E)
----------------	---

SUPPORT

For more information, visit [avigilon.com](https://www.avigilon.com) or sales@avigilon.com for product support.



AVIGILON